


RAPID LOW BUILT BASE

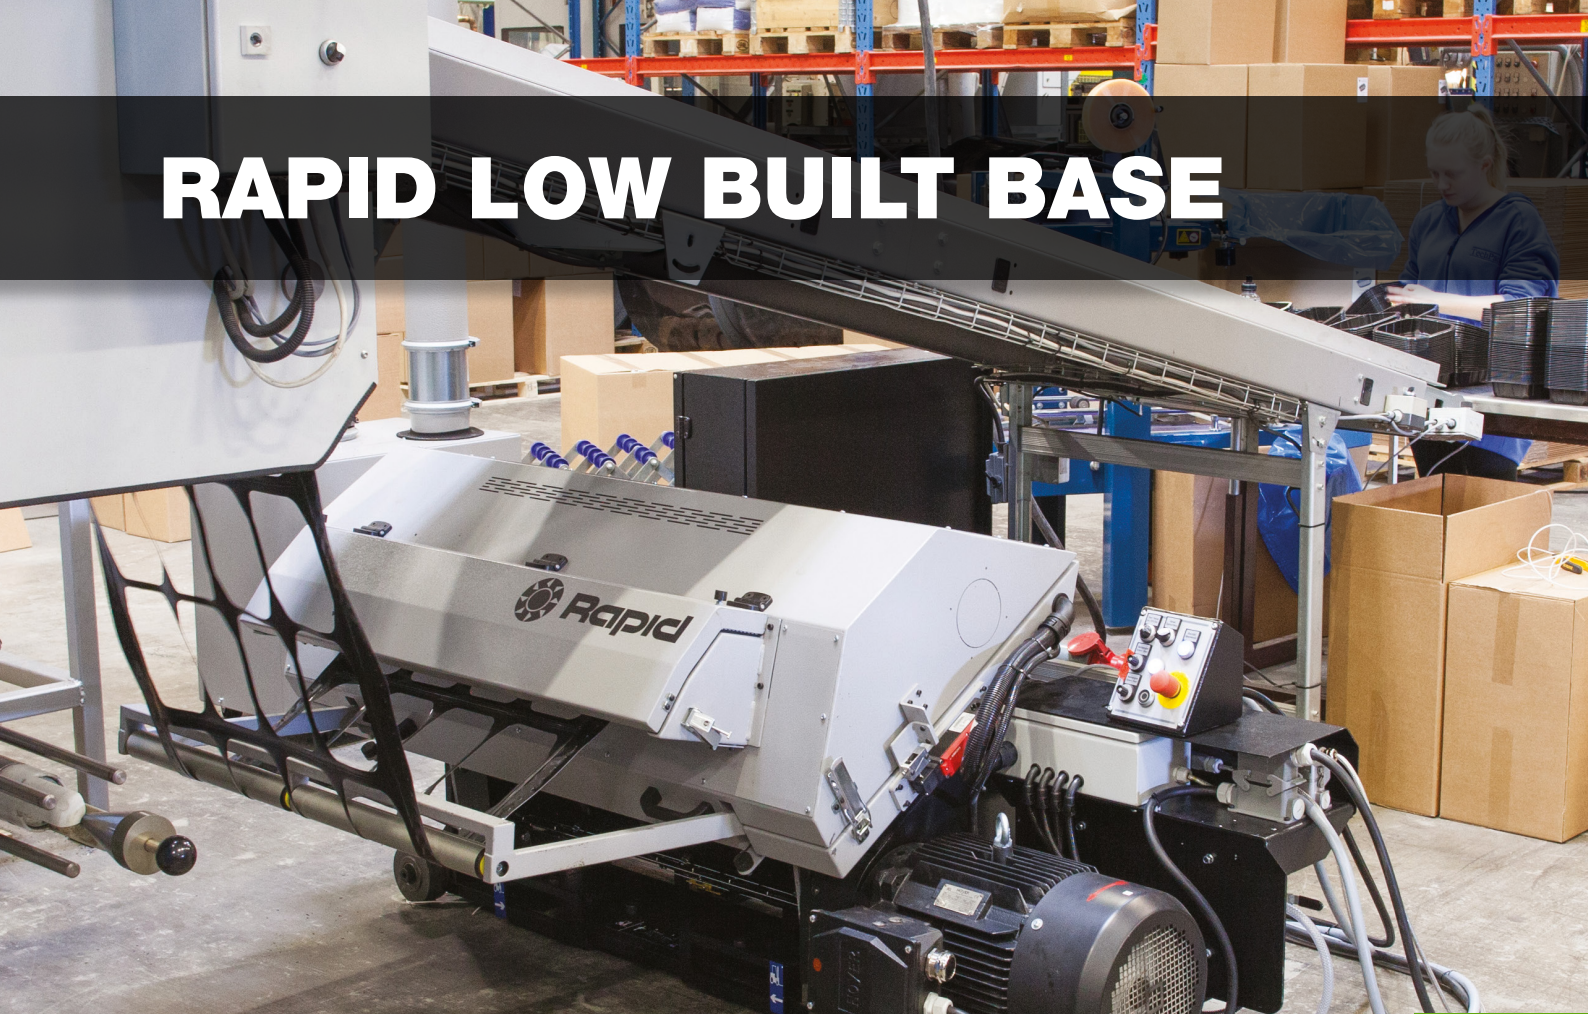

The new Rapid 300-Series LBB, Low Built Base, granulator is an extremely low built granulator series available in three widths, up to 1500 mm.

Typical applications involve thermoforming where the granulator can operate with either a rollfeed unit synced to line speed with a loop control or by a simple tray for falling skeletal frames from the line.

Other suitable applications are as a final granulation step in a setup with a shredder and also for films and sheets up to 8 mm thickness depending on material.



Rapid LBB provides:

- High quality regrind
- Low height, 600 mm only
- 3 widths, 900, 1200 and 1500 mm
- Easy service and maintenance with split screen boxes and split screens
- Powerful operation with motors up to 30 kW
- Electrical jack opening to easy access granulator interior



The Rapid LBB produces high quality regrind with throughputs up to 1200 kg/h.




Specifications

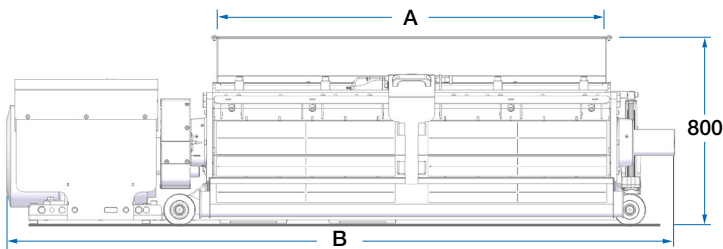

LBB	300-90	300-120	300-150
A	900	1200	1500
B	2000	2300	2600

All dimensions in mm.

Infeed alternatives

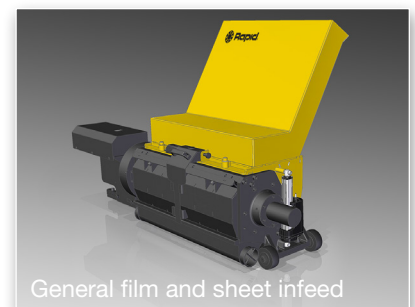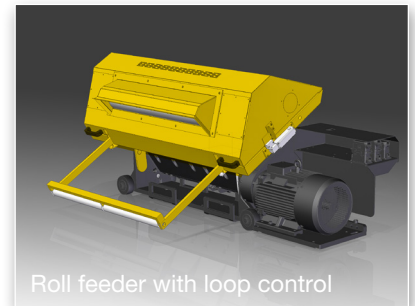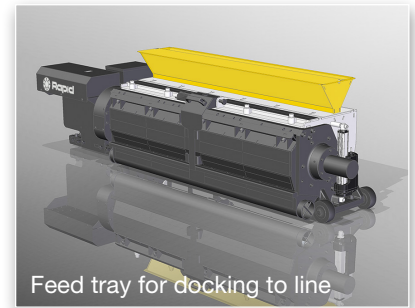

Features

- Split screen on 300-120 and 300-150
- True scissors cutting action
- Rotor stand still guard
- Heavy duty transmission
- Solid stand with castors

Options

- Various hoppers; tray, roll feeder, sheets
- Electrical jack opening
- Screen diam. Std/opt. (mm) 6, 4 / 8 / 10 / 12
- Extra flywheel

- Rotor diam. (mm)
- Rotating knives
- Fixed knives
- Motor, standard, (kW)
- alternatives
- Weight (kg)

300-90	300-120	300-150
	300	
6	8	10
6	6	9
7.5	11	11
	7.5 / 11 / 15 / 18.5 / 22 / 30	
1 200	1 350	1 500



Rapid Granulator AB

Box 9, SE-333 02 Bredaryd, Sweden

Phone: +46 (0)370 86500

E-mail: info@rapidgranulator.se • www.rapidgranulator.com